

FUNNEL

Design by .

VIBIA
LIGHT IS CREATION

Reference

2013.

Application

Ceiling Fixtures

Installation type

Surface mounted

Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle. Available in two finishes: matt white lacquer.

Diffuser


Aluminum body

Finish



2013-93.
White matte
lacquer

Sketch



Electrical characteristics

6 x LED 3.7W 350mA



Total 22.2 W



Physical characteristics

1 Box / 9.84 x 16.54 x 16.54 inch. / Vol. 1.5574 ft³ /
Gross weight 5.6 lb. / Net weight 4.4 lb.

Installation and assembly

Please see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.

Photometric data

Efficiency : 78.23%

Coordinate system : CG

Total flux : 2556.00 lm

Maximum value : 122.09 cd/klm


Light position : C=0.00 G=120.00

Double symmetrical : 3


Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

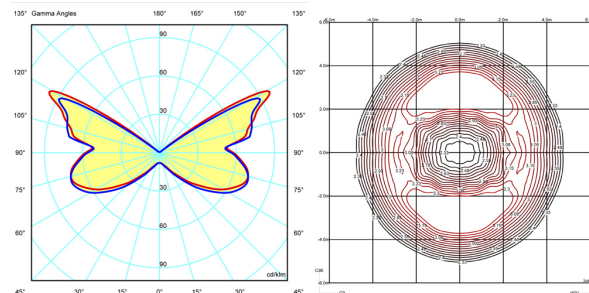

Certificates

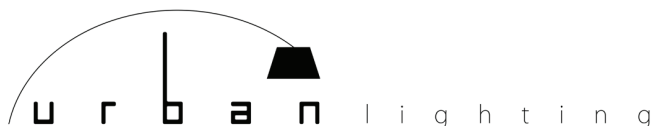

619.232.6064 | sales@urbanlighting.net | 301 4th Avenue | San Diego, CA 92101