



The newest addition to AAMSCO Lighting's collection of energy saving bath and vanity luminaries.






∃ ∏ lighting

Ц

619.232.6064 | sales@urbanlighting.net | 301 4th Avenue | San Diego, CA 92101

## *MIRADA-LUX*® RST5

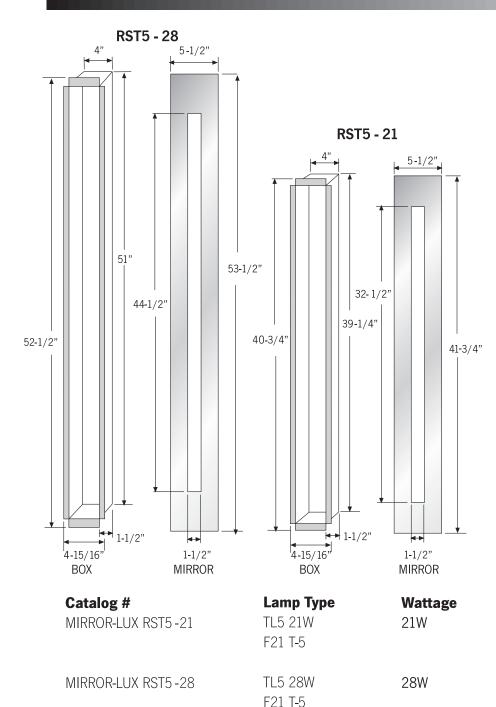

ц г

Ь

Э

П

lig


htin

g

## TECHNICAL AND ORDERING DATA

## **Standard Specifications**

- Voltage: 120 (220 available, consult factory).
- Ballast: Electronic high power factor.
- **Dimming Ballast:** Option available.
- Knock Out: MC cable is inserted through 1/2" KO's. No electrical box is required.
- Knock out Position:
  - 3" from bottom.
  - 3" from left side (box facing front).
- **Mounting:** Mounting holes (four) provided for mounting to mechanically sound surface 1-1/2" from top and bottom, 1" from sides.



- ETL Listed for recessed damp locations.
- \* For custom shapes and sizes, please contact factory.

## **Available Kelvin Temps** 2700, 3000, 3500, 4100, 6500

2700, 3000, 3500, 4100, 6500



