




Specifications Model number


| | |
|-------------------------------------|------------------------------|
| Energy Consumption: | 6 watts |
| Number of LEDs: | 28 LEDs |
| LED Rated Lifespan: | 50,000 hours |
| Color Temperature (Typical) – Cool: | 4,500 K |
| Color Temperature (Typical) – Warm: | 3,500 K |
| Color Rendering Index (CRI): | 85 |
| Dimmer: | Built-in touchstrip |
| Brightness Adjustability: | Multiple dimming levels |
| Standard Color Finish*: | Black, Silver, Orange |
| Material: | Aluminum/Plastic |
| Cord Color: | Black |
| Cord Length: | 10' |
| Transformer (100–240 V; 50/60 Hz): | Included – C-UL-US Certified |

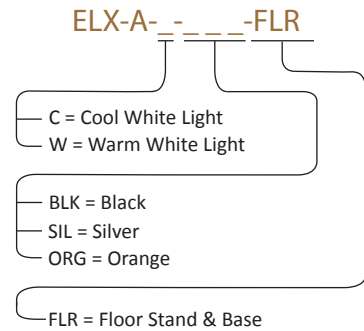


*Custom colors are available at additional cost. Contact Konzept or your sales representative for a quote.

Photometrics Dimensions

Light source placed at 15" away from worksurface

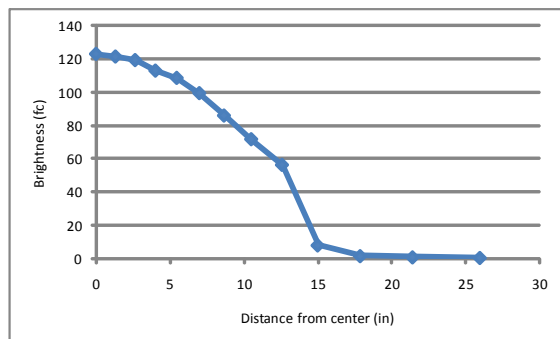

Horizontal and vertical reach

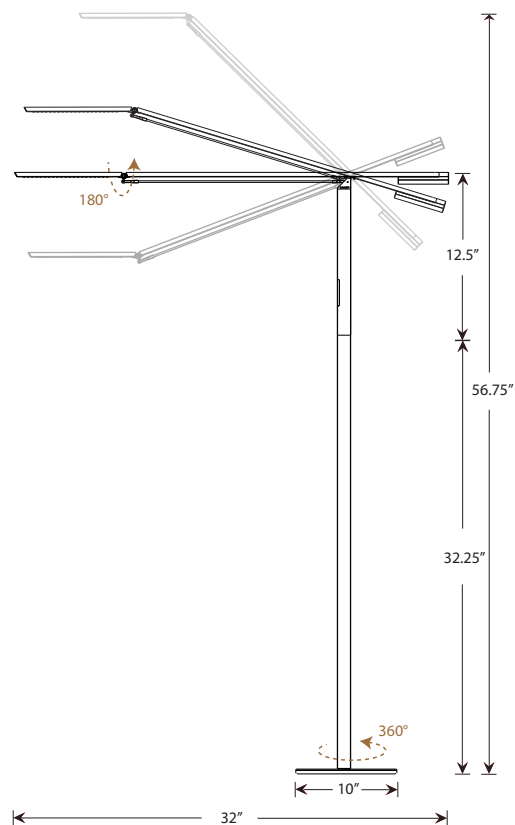

LEED credit eligibility

Energy & Atmosphere (EA)

Credit 1.1: Optimize Energy Performance
LED lighting to reduce energy consumption.
(Potential points: 3)

Innovation In Design (ID)

Credit 1.1- 1.4: Innovation in Design
EQUO® Floor incorporates a unique combination of features including feather-light adjustability with counterbalance mechanism, touch sensitive dimming, and constant angle joint stabilization.
(Potential points: 4)

Materials & Resources (MR)


Credit 4.1: Recycled Content - 10%
Lamps contain parts made out of 10% pre-consumer recycled content.
(Potential points: 1)

Credit 4.2: Recycled Content - 20%
Lamps contain parts made out of 20% pre-consumer recycled content.
(Potential points: 2)

Environmental considerations Accessories (*optional)

Lamp contains 35% preconsumer recycled material by weight*
Aluminum housing is fully recyclable
All color finishes use water-based paint
All cardboard used in packaging is FSC certified
LEDs do not contain mercury

*in standard configuration (includes transformer and weighted base)



Occupancy sensor*
(P7-02-OCC01A)

