




# **ENZIS TRACK**

The light weight Enzis Track is easily field bendable to achieve any radius or hard angle, eliminating the need for angle connectors or predetermined radius measurements. Two malleable aluminum rods in the flexible track hold the desired shape even when used with suspended cable supports. No tools are required to attach the full array of mounting hardware or fixture adaptors to the track. Enzis Track system can be suspended or semi-flush mounted and allows the use of Bruck Uni-Light fixtures and pendants.



Part Number	Description	Technical
140006bz 140006mc 140008bz 140008mc 140012bz 140012mc	72" 72" rigid straight, 96" rigid straight, 96" 144" 144"	300VA maximum thru-put 12V AC/DC rated Suitable for dry locations only












## **ENZIS CEILING SUPPORT**














can be field shortened







Part Number	Description
140100bz	<b>39 3/8</b> "
140100mc	39 3/8"







## **ENZIS WALL SUPPORT**



# **ENZIS CONNECTORS / ISO CONNECTORS**







Part Number	Description
140320bz 140320mc 140330bz 140330mc	■ bronze ■ matte chrome ■ bronze, ISO ■ matte chrome, ISO

### **Technical**

300VA maximum 12V AC/DC rated Suitable for dry locations only







### **ENZIS POWER FEED ENZIS POWER FEED CANOPY**

hting









### **Technical**

300VA maximum Suitable for dry locations only

12V AC/DC rated

### **Technical**

300VA maximum 12V AC/DC rated Suitable for dry locations only Mounts to a 3" - 4" round J-box








can be field shortened



## **DUAL ROD POWER FEED**

can be field shortened
















## **Technical**

300VA maximum 12V AC/DC rated Suitable for dry locations only 2 1/4" hole cutout Required material thickness 3/16" - 1 1/16" not thru wire rated



**ENZIS 300W DIRECT FEED TRANSFORMER** 

Technical

Dimmable

300VA maximum (50VA minimum)

Suitable for dry locations only

Mounts to a 3" - 4" round J-box

120V AC, 50/60Hz input 11.7V AC output


300VA maximum


12V AC/DC rated


Suitable for dry locations only Mounts to a 3" - 4" round J-box




# **ENZIS 150W DIRECT FEED TRANSFORMER**












### **Technical**

150VA maximum (20VA minimum) 120V AC, 50/60Hz input 11.7V AC output Suitable for dry locations only Mounts to a 3" - 4" round J-box Dimmable



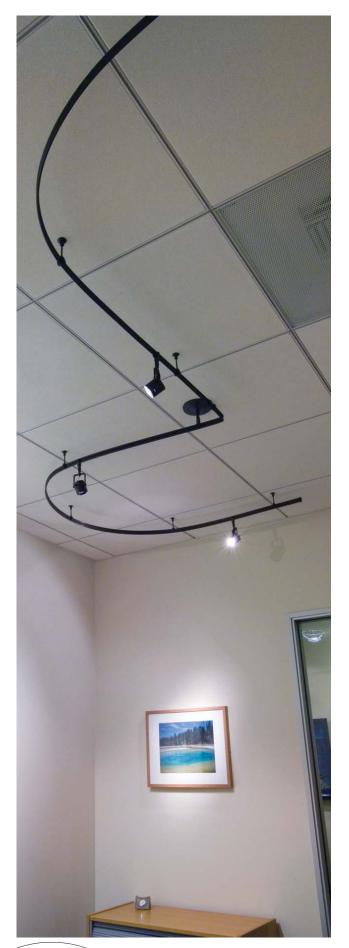


8

lighting



## **ENZIS UNI-PLUG ADAPTOR**



### **Technical**

70 Watt maximum for halogen 70VA maximum for LED 12V AC/DC rated Suitable for dry locations only

