

Light sources

LED model: LED 2 x 2.25W included, 2700° K, CRI80, 356 lm, 90lm/W source, warm white

LAMPS ARE INCLUDED

Installation

Standard back plate included for installation over 2" x 4" handy box (minimum 2"-1/8 deep / 16.5 cu.in.). Optional flush mounting kit available. Driver for installation only in j-box or remote.

PSU

LED Driver included, 15W Max - 700mA 120VAC 9-17VDC - Trailing edge/ELV dimming. For optional drivers and dimming technology, please refer to our website or contact our representatives.

Finish

Wrinkled white painted aluminium

Lampshade

Wrinkled white painted aluminium

Lampshade colors



BC

UA ALRIS P

Design by Brian Rasmussen


Collection that includes an aluminium pendant and wall light painted in wrinkled white finish. Pendant with halogen or fluorescent light sources; wall light with LED lamping, with or without wall mounting box.

Typology: WALL LIGHT


Certifications:




TITLE 24 COMPLIANT DRY LOCATION ONLY

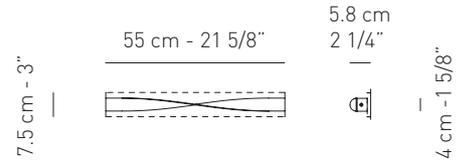

standard backplate, INCLUDED




slim backplate OPTIONAL, for direct installation or when using flush mounting kit



PSU must be installed in accessible and remote location

lb 2.87
ft³ 0.212



619.232.6064 | sales@urbanlighting.net | 301 4th Avenue | San Diego, CA 92101

Product code composition

CODE	COLOR	FINISH	LAMPING
UAALRISPXXXXLED	white		LED 2 x 2.25W warm white dimmable ELV TRAILING EDGE
UMDKTMINDUNV	drywall flush mounting kit for 4" square/octagonal J-Box	OPTIONAL	
PLACCAAPALRISHA	slim backplate for direct installation or when using flush mounting kit	OPTIONAL	



UAALRISPXXXXLED

NAME: _____

NOTES: _____

Please Note: Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this technical data sheet. Confirm with Axo Light before order, reference: 1-2015 technical sheet.